




NOTES
It is the contractors responsibility to check design levels and sizes for compliance. Any discrepancies or errors to be identified to the design team.

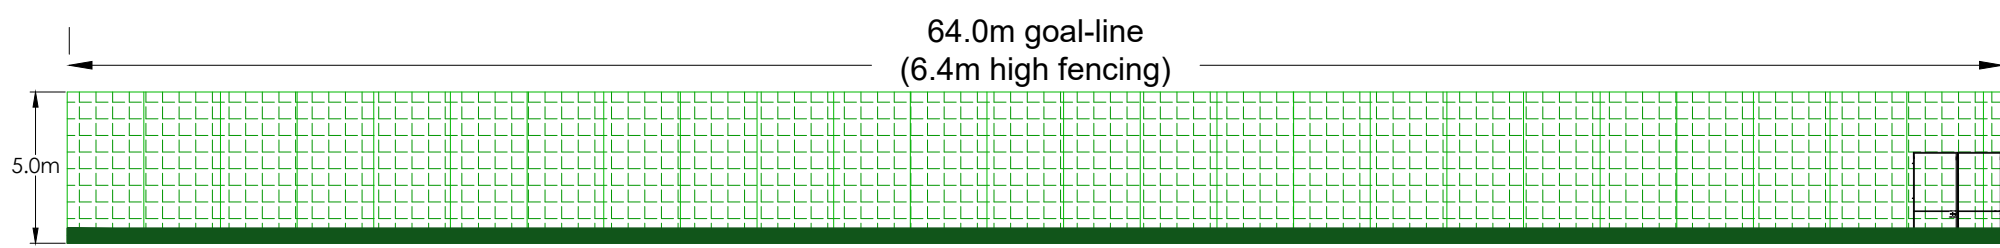


AA TRANSVERSE SECTION
SCALE: 1:250

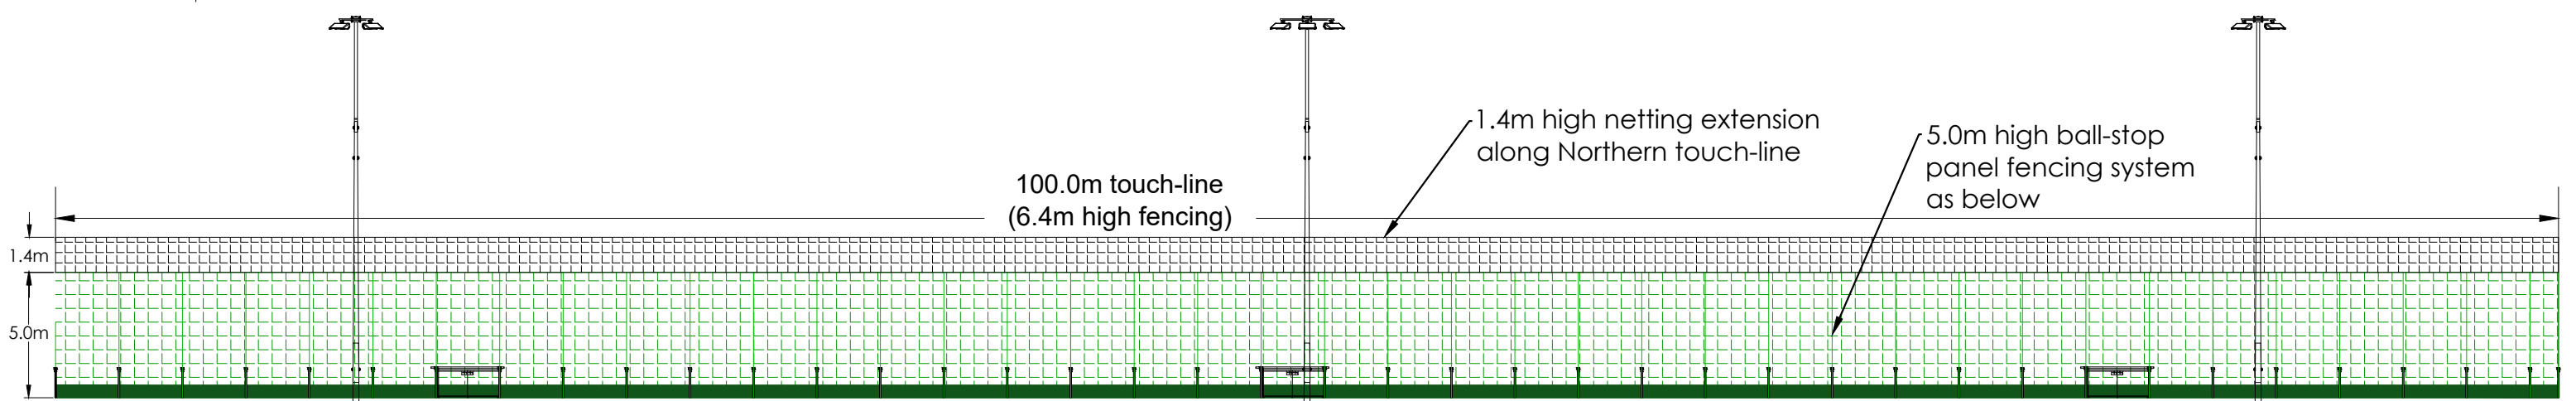

BB LONGITUDINAL SECTION
SCALE: 1:250

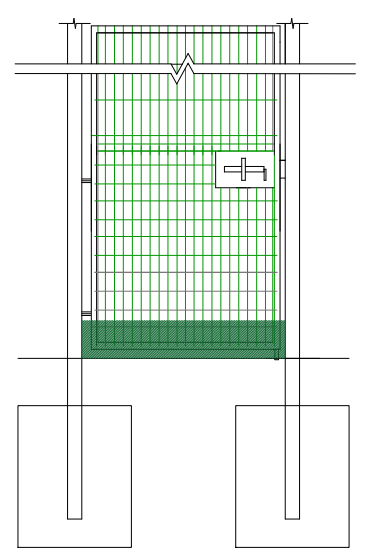

Typical single gate

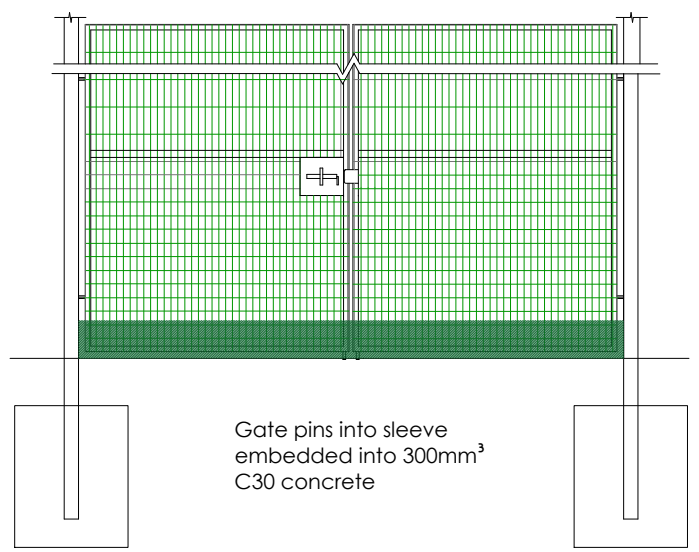


Typical double gate

Gates hinges allow for 180° opening out away from pitch. gate should facilitate being pinned opened and shut. gates 2.4m high.

Gate frames to be square hollow section
Gate posts to be square hollow section
Slide bolt with facility for padlock

Bottom panel 1.2m high 50x50mm 8/6/8 twin wire fencing. There above 200x50mm 8/6/8 twin wire.

Gate pins into sleeve embedded into 300mm³ C30 concrete

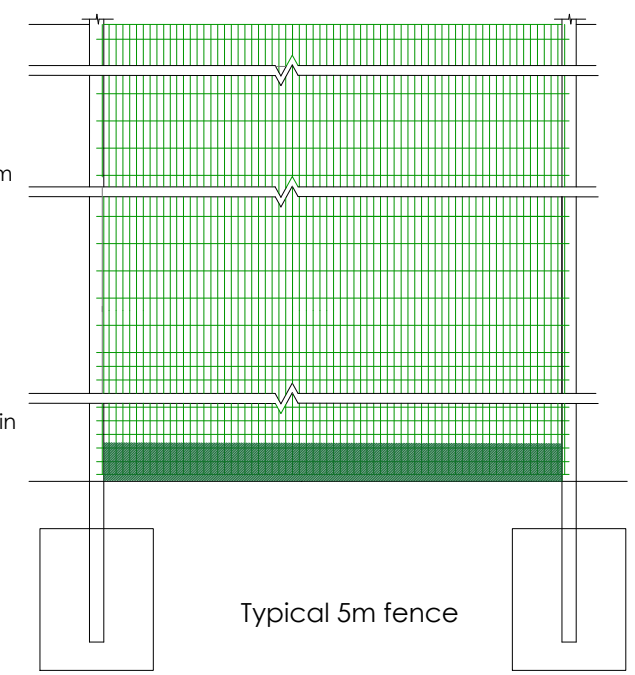


Typical 5m fence

fence posts to be rectangular hollow section
bottom panel 1.2m high 50x50mm 8/6/8 twin wire fencing.
from 1.2m to 5m 200x50mm 8/6/8 twin wire
ball stop fencing panel secured to posts and frame using coated slotted clamp flats and m8 bolts and m8 anti-vandal nuts
foundations c30 concrete sizes to be confirmed based on exposed ground conditions


New kickboards 200mm high made from recycled material to be installed around the base of the new fencing for the full pitch perimeter. To aid retaining infill material within the playing area.

03 GATE DETAILS
ELEVATION
SCALE NTS

04 FENCE PANEL
ELEVATION
SCALE NTS

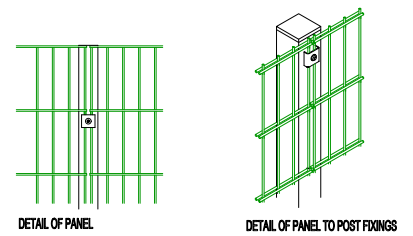

panel (200x50x6) connection detail perimeter fencing NTS

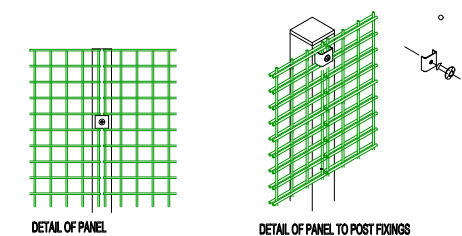

panel (50x50x6) connection detail perimeter fencing NTS

REVISION DETAILS BY DATE CHECKED



info@sportslabsconsult.com

TALLAGHT 3G FENCING SECTIONS
NEW 3G PITCH



Date: 04/2021 Scale: 1:500 @ A3 Job No. 2936 Drawn by: FG Checked by: DD