

LEGEND:

- PROPOSED WORKS**
- PROPOSED GAA PITCH
 - PROPOSED SOCCER PITCH
 - PROPOSED PLAYGROUND AREA
 - PROPOSED LANDSCAPE BERMS
 - PROPOSED FOOTPATHS
 - PROPOSED CARRAGEWAY
 - PROPOSED PERMEABLE PAVING (CAR PARK)
 - SITE BOUNDARY
 - PROPOSED STOPBALL SYSTEM
 - PROPOSED TIMBER FENCING

SOFT LANDSCAPING

- Betula pendula* 16-18 cm g rb, 1.8m clear stem 203no.
- Quercus robur* 20-25 cm g rb, 1.8m clear stem 115no.
- Prunus padus* 16-18 cm g rb, 1.8m clear stem 18no.
- Prunus avium* 16-18 cm g rb, 1.8m clear stem 17no.
- Alnus glutinosa* 14-16 cm g rb, 1.5m clear stem 25no.
- Fagus sylvatica* 25-30 cm g rb, 1.8m clear stem 26no.
- Pinus sylvestris* 20-25 cm g rb, 1.5m clear stem 22no.

Native mixed woodland planting. Extent and planting mix of woodland to be determined at detail design stage

Native Pine woodland to encourage red squirrels. Extent and planting mix of woodland to be determined at detail design stage

Deer protection to all trees and woodland planting mixes

- Swale planting mix
- Bulb planting
- Meadow mix 01
- Meadow mix 02
- Grass seeded lawn 30g/m²
- Existing vegetation to be retained

NATURAL PLAY ELEMENTS


Natural logs for running, balance and climbing and closely inspect investigation

- Natural log steps
- Grass mounding
- Seating

Existing mown grass paths will be maintained to preserve informal routes



Revision	Description	Initials	Date

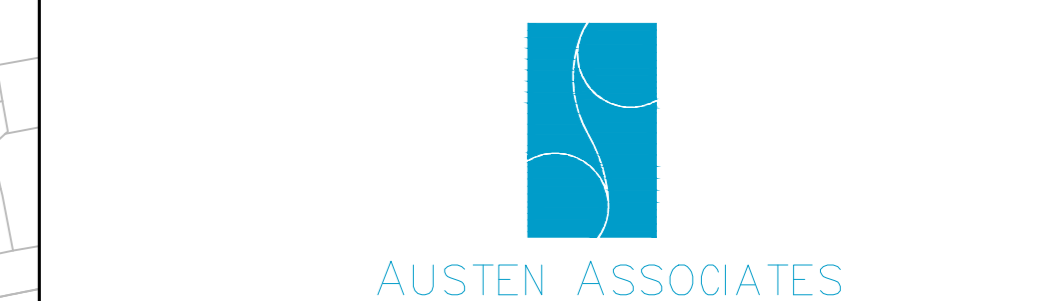

Client	SOUTH DUBLIN COUNTY COUNCIL		
Project	DODDER GREEWAY PHASE 1 - KILTIPPER PARK		
Dwg. Title	PROPOSED OVERALL LAYOUT		
Drawn By	KT	Date	APR. 2020
Checked by	RG	Scale	1:1250 @ A0
Dwg. Progress	PART 8		
Dwg. No.	18_123_01_1400		

