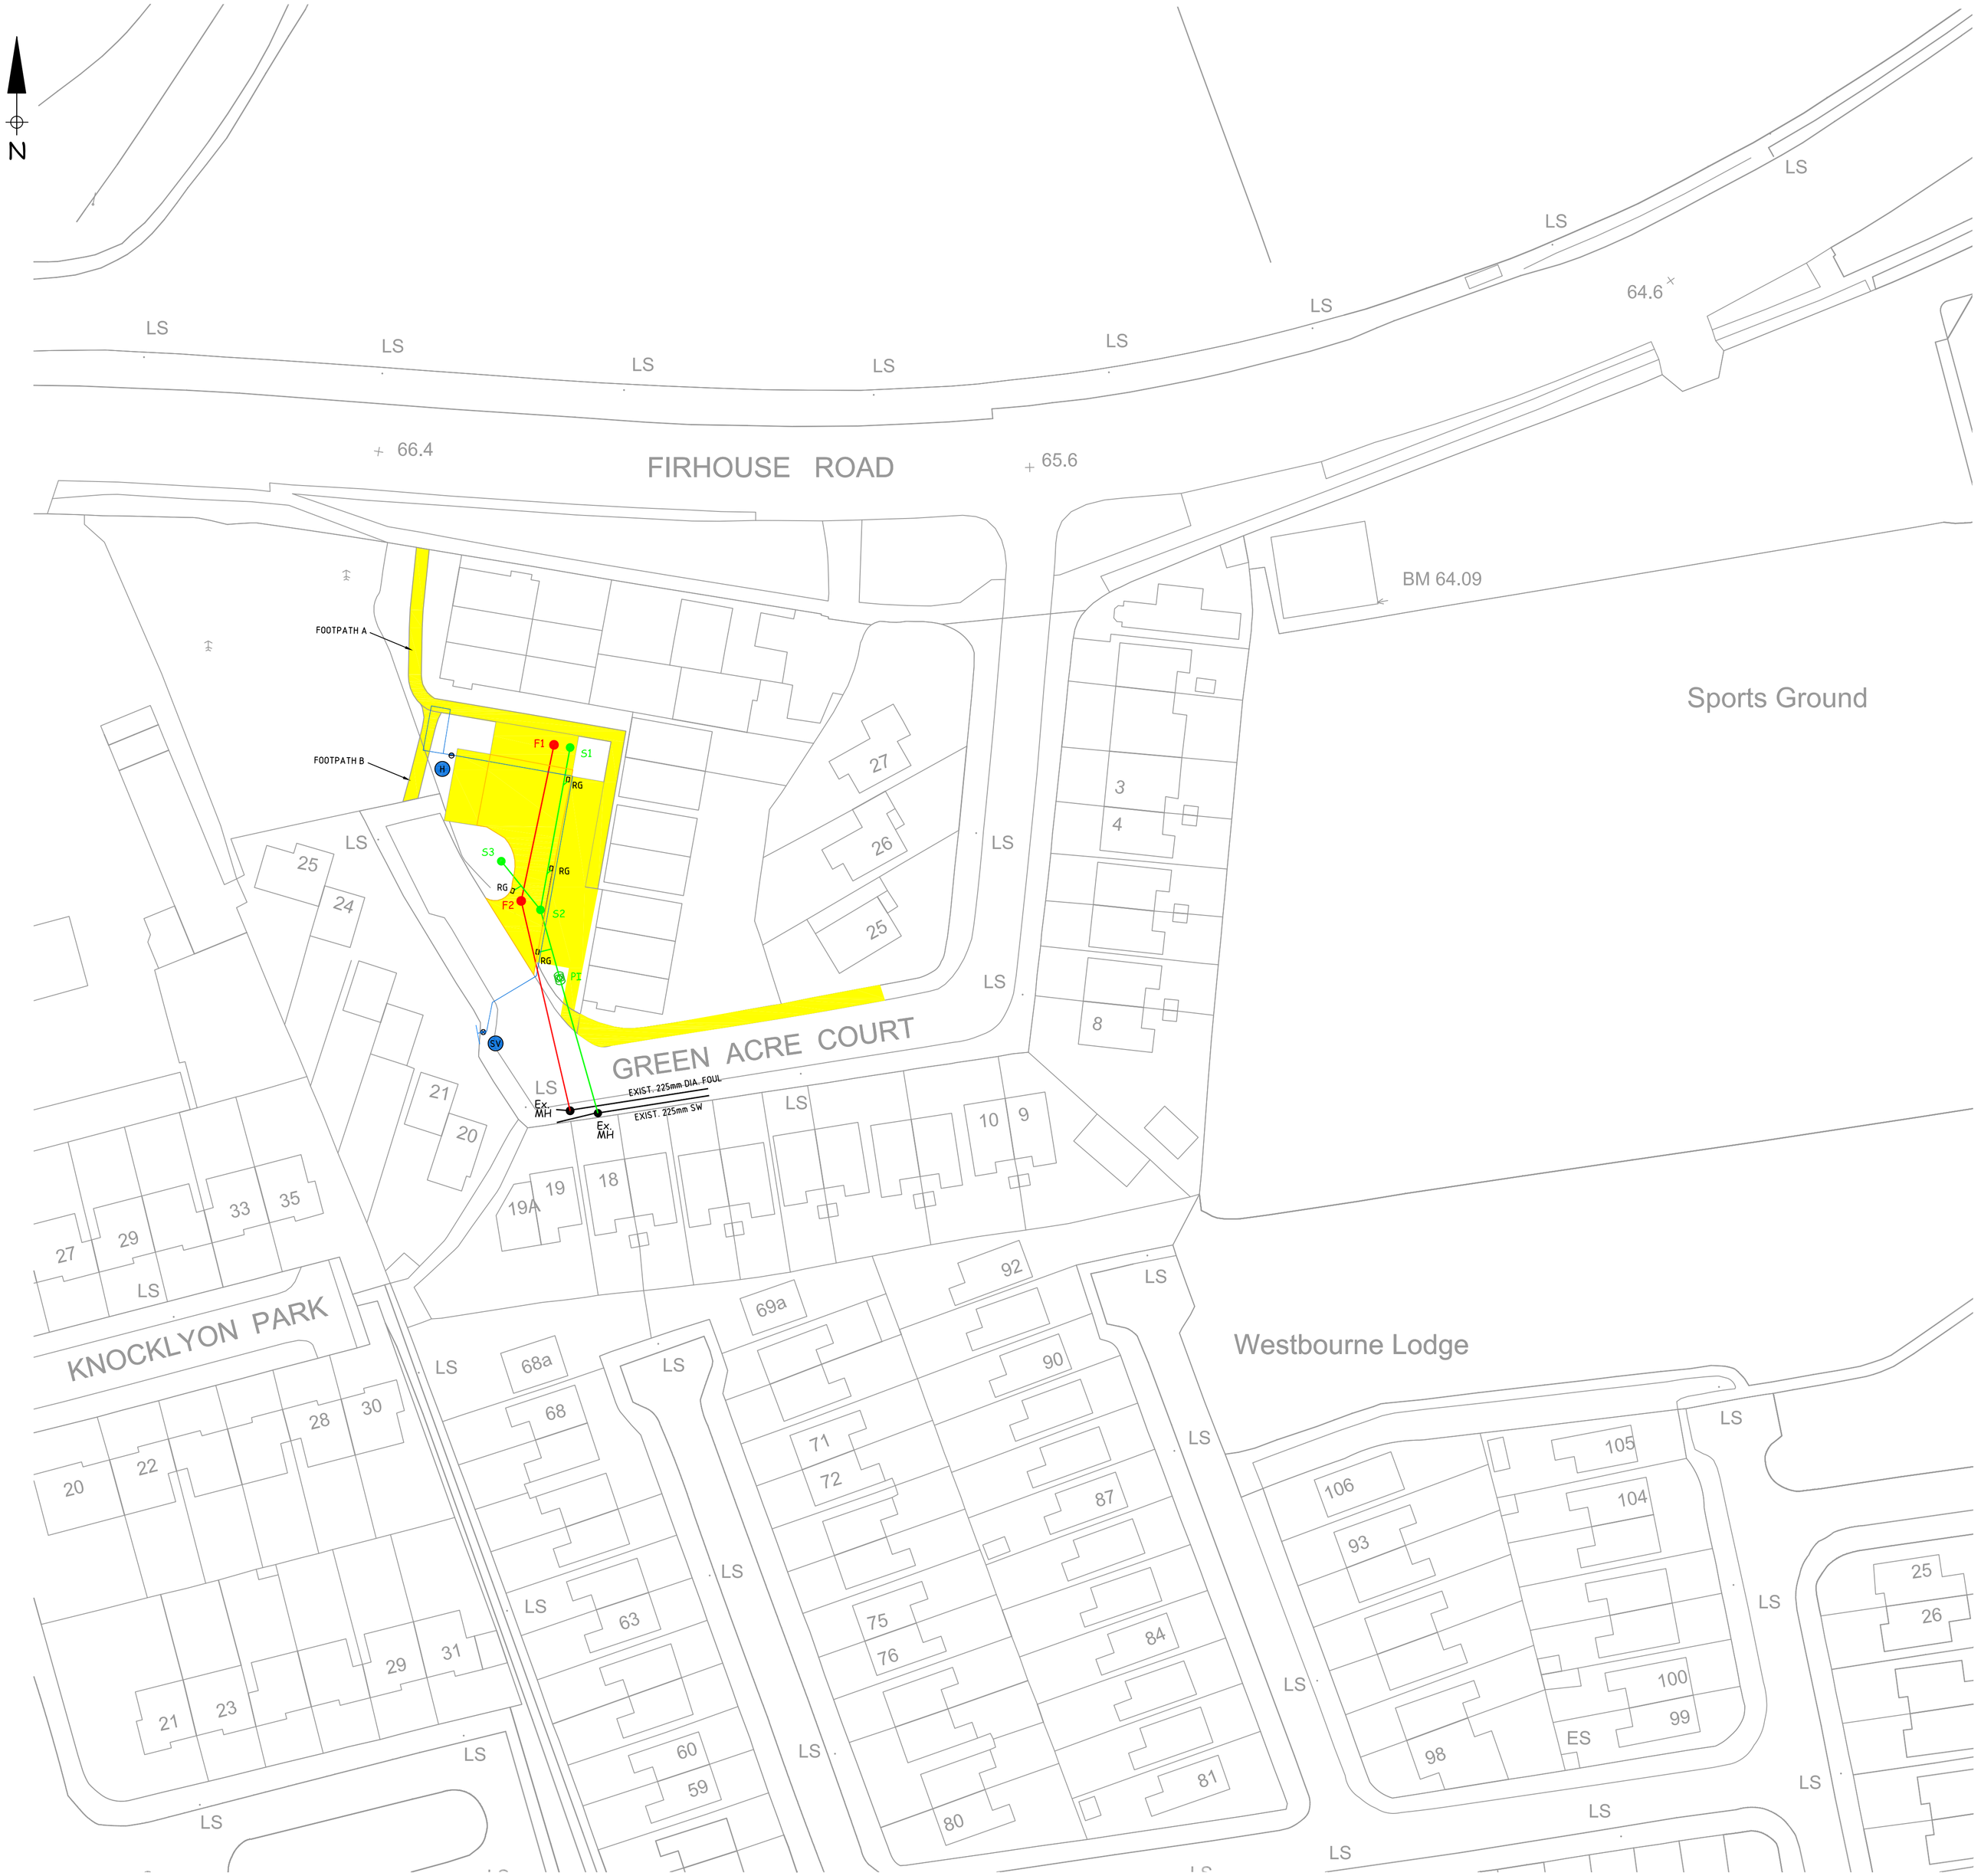

Manhole No.	Cover Level	Invert Level	Pipe Size	Manhole No.	Cover Level	Invert Level	Pipe Size
S1	66.561	65.000	225	F1	66.578	65.250	225
S2	66.357	64.750	225	F2	66.411	64.980	225
S3	66.539	64.810	225				

AREAS TO BE TAKEN IN CHARGE SHOWN THUS

NOTE:-
THIS DRAWING DOES NOT CONSTITUTE A RECOMMENDATION TO HAVE AN ESTATE TAKEN IN CHARGE.
THIS DRAWING REFERS TO THE TAKEN INTO CHARGE OF THE ROADS AND SERVICES AS INDICATED IN COLOUR.
ALL SEWERS ARE 225mm Dia. UNLESS OTHERWISE STATED.
SCALE DIMENSIONS NOT TO BE USED.
LENGTH OF ROADS AS ON ATTACHED ROAD SCHEDULE.
BOUNDARY TREATMENTS TO ROADS TAKEN IN CHARGE i.e. WALLS AND / OR RAILINGS ARE NOT INCLUDED IN & ARE NOT PART OF THE TAKEN IN CHARGE PROCEDURE.

Legend:-

FOUL SEWER — MH — RED

SURFACE WATER SEWER — MH — GREEN

WATERMAIN — BLUE

HYDRANT — SLUICE VALVE

AIR VALVE

Rev	Description	Date

Comhairle Chontae Atha Claith Theas
South Dublin County Council
Building & Development Control

Comhairle Contae Átha Cliath Theas
South Dublin County Council

Eddie Taaffe
Director of Land Use Planning & Transportation Dept

John Coughlan
Chartered Engineer
Senior Engineer

Taking in Charge Scheme
Greenacre Court Extension
Firhouse Road
Dublin 16

Area Committee :- Rathfarnham

Includes Ordnance Survey Ireland data reproduced under OSi License number 2016/23/CCMA/SouthDublinCountyCouncil. Unauthorised reproduction infringes Ordnance Survey Ireland and Government of Ireland copyright. © Ordnance Survey Ireland, 2017

Drawn	Scale	Building Control No.
C. Bolger	1:500 @ A1	BC - 1445
Chkd. S.B.	Date May 2017	
O.S. Ref. 3388-A	Status Taken in Charge	